



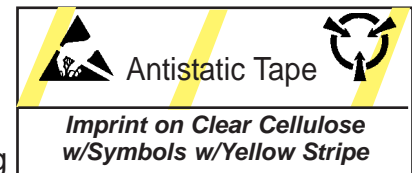

Antistatic Cellulose Tape

For general purpose applications

- 2.4 mil (0.06 mm) total thickness
- Cellulose film resistance 10E10 - 10E11 ohms
- Rubber based adhesive absorbs moisture
- Adhesive surface resistance 10E10 - 10E11 ohms
- Temperature Range -10°C - 71°C (14°F - 160°F); meets MIL-B-81705 of 100°C for 10 min max
- Available in clear, clear with ESD symbols, and clear with ESD symbols with yellow stripe. Marking is approved symbols of Mil STD-1285* and ESD Association. Symbols printed in between film and adhesive; will not rub off.

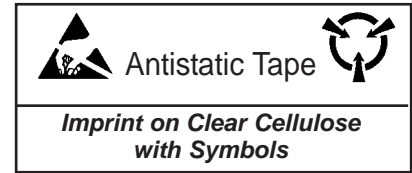

SPI

Tape	Width				Core	Length
	0.5"	.75"	1"	2"		
Antistatic Clear Cellulose	96900	96901	96902		1"	36 yds
	96903	96907	96911	96915	3"	72 yds
Antistatic Clear Cellulose with Symbols	96919				1"	36 yds
	96921	96933	96925	96925	3"	72 yds
Antistatic Clear Cellulose w/Symbols w/Yellow Stripe						
	96934	96935	96936	96937	3"	72 yds

Width tolerance ±1/32"

Tape is wound on a low-sloughing plastic core.

The user must determine the suitability for use of an antistatic tape for his particular application.

Tape widths are nominal metric ±0.8 mm (±1/32").

- 1/4" is 6 mm nominal or 0.236"
- 1/2" is 12 mm nominal or 0.472"
- 3/4" is 18 mm nominal or 0.709"
- 1" is 24 mm nominal or 0.945"
- 2" is 48 mm nominal or 1.890"



No sulfur, surfactants or silicone based material (adhesive, film backing, release material) is used in the manufacture of our cellulose tape.

RoHS Compliance Statement

None of the following materials are intentionally added in manufacturing this product: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE) as outlined in the Directive 2002/95/EC Article 4.1. See SPI Westek Inc. letter on-line at SPIWestek.com.

Note: For best results, tape inventory should be continually replenished. It is recommended that rolls of tape be stored flat and rotated (flipped over to the other side) periodically. Tapes should be stored in a dry, well ventilated room with a reasonably consistent temperature of 68°F (20°C) and be protected from exposure to direct sunlight. Tape should not be stored in ultraviolet sunlight, moisture, or heat. See Limited Warranty; SPI expressly warrants that for a period of one (1) year from the date of purchase, our Wescorp Brand Antistatic Tape will be free of defects in material (parts) and workmanship (labor). Tape over one year old should be evaluated by the user to determine acceptability for the user's application.

*Military organizations sometimes use MIL-STD-1285 for hardware marking and that document once required the use of the "three arrows in a circle" symbol. That symbol has been changed for consistency with industry marking to the "hand in triangle" ESD Susceptibility symbol. (Ref: TR20.20 section 5.3.14.1)

*Wescorp is a Desco Industries brand.

WESCORP* ANTISTATIC CELLULOSE TAPE

ESD SYSTEMS.com

ESD SYSTEMS.COM
432 NORTHBORO ROAD CENTRAL
MARLBORO, MA 01752 USA
TEL. (508) 485-7390 FAX (508) 480-0257



Visit our online
library of Tech Drawings:
ESDSystems.com

DRAWING NUMBER
96900

DATE:
December
2008